

Gama Doméstica

Split pared ARTIC


daitsu

A+++ SEER

A+ SCOP

A+++ SCOP (Cálido)

REFRIGERANTE
R32

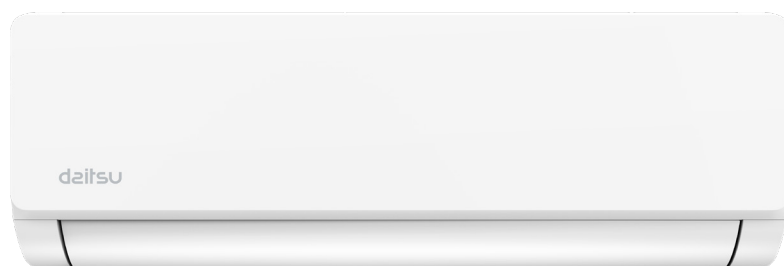

**MOTOR DC
INVERTER**



**CONTROL
WIFI**



**CONTROL
POR VOZ**



**MODO NOCHE
SILENCIOSO**



**FILTRO
DE AIRE**



**SWING LAMA
VERTICAL**



**PROGRAMACIÓN
HORARIA**



**SENSOR
I FEEL**



**INTELIGENCIA
ARTIFICIAL**

Modelo			DS-9KZ	DS-12KZ	DS-18KZ	DS-24KZ
Código			3NDA01700	3NDA01705	3NDA01710	3NDA01715
Potencia frigorífica	Nominal (Mín-Máx)	kcal/h	2270 (808-2924)	3027 (860-3526)	4420 (1075-5074)	5547 (1574-6192)
		kW	2,64 (0,9-3,4)	3,52 (1,0-4,1)	5,14 (1,25-5,9)	6,45 (1,83-7,2)
Potencia calorífica	Nominal (Mín-Máx)	kcal/h	2709 (808-3440)	3234 (860-3612)	4558 (1075-5753)	6050 (1591-6846)
		kW	3,15 (0,9-4,0)	3,76 (1,0-4,2)	5,3 (1,25-6,7)	7,03 (1,85-8,0)
Consumo nominal	Frío / Calor	kW	0,67/0,83	1,03/1,00	1,37/1,35	1,80/1,89
		kWh/año	108	145	210	264
Consumo eléctrico anual	Calor clima medio	kWh/año	718	834	1.332	1.776
		kWh/año	650	851	1.349	1.724
EER / COP	Frío / Calor		3,94 / 3,79	3,41 / 3,73	3,74 / 3,92	3,58 / 3,72
SEER (Clase energética)	Frío		8,5 (A+++)	8,5 (A+++)	8,5 (A+++)	8,5 (A+++)
SCOP (Clase energética)	Calor clima medio		4,1 (A+)	4,2 (A+)	4,1 (A+)	4,1 (A+)
			5,6 (A+++)	5,1 (A+++)	5,4 (A+++)	5,2 (A+++)
Alimentación eléctrica		V / F / Hz	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50	220-240 / 1 / 50
Intensidad absorbida	Frío / Calor	A	3,2 / 3,8	4,9 / 4,5	6,2 / 6,1	8,1 / 8,4
Cable de alimentación		nº x s	(U.E) 2 x 2,5 + T	(U.E) 2 x 2,5 + T	(U.E) 2 x 2,5 + T	(U.E) 2 x 2,5 + T
Cable de interconexión		nº x s	3 x 1,5 + T	3 x 1,5 + T	3 x 1,5 + T	3 x 1,5 + T
Caudal de aire U. Interior		m³/h	630	630	1000	1050
Caudal de aire U. Exterior		m³/h	2.000	2.000	2.600	3.000
Rango de funcionamiento	Frío	°C	-15 / +53	-15 / +53	-15 / +53	-15 / +53
		°C	-25 / +30	-25 / +30	-25 / +30	-25 / +30
Presión sonora U. Interior	SA / A / M / B / SB	dB(A)	44/36/33/26/22	44/36/33/27/22	48/41/39/32/27	53/45/41/36/32
Presión sonora U. Exterior		dB(A)	53	55	55	59
Potencia sonora U. Interior	SA / A / M / B / SB	dB(A)	54/47/43/37/32	55/48/44/38/33	58/50/46/39/33	63/58/55/46/43
Potencia sonora U. Exterior		dB(A)	63	63	65	69
Diámetro tubería	Líquido - Gas	Pul.	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	1/4" - 1/2"
Distancia máxima permitida	Total / Vertical	m	25 / 10	25 / 10	25 / 10	25 / 10
Refrigerante	Tipo		R-32	R-32	R-32	R-32
Carga refrigerante		Kg (TCO2eq)	0,51 (0,345)	0,57 (0,385)	0,70 (0,473)	1,20 (0,81)
Dimensiones U. Interior	Alto / Ancho / Fondo	mm	305/811/195	305/811/195	321/1005/220	321/1005/220
Dimensiones U. Exterior		mm	499/785/290	551/809/305	603/862/349	700/920/380
Peso neto	Ud. Int / Ud. Ext	kg	8,3 / 21	8,3 / 22	11,5 / 29	11,7 / 38



Accesorios compatibles

	Código		Código
Filtro Multifunción	3NDA9017	Filtro De Ionizador	3NDA9070
Filtro Carbono Activado	3NDA9016	Filtro Anti Polvo Electrostático	3NDA9072
Filtro Anti Polvo Estándar	3NDA9067	Filtro Anti Ácaros	3NDA9073
Filtro Catechin	3NDA9068	Filtro Pm 2,5 + Filtro Ionizador	3NDA9074
Filtro Fotocatalítico	3NDA9069	Filtro Pm 2,5 + Filtro Catequina	3NDA9075

Daitsu Connect

